


Cadena de rodillos doble / Double Strand Roller Chains

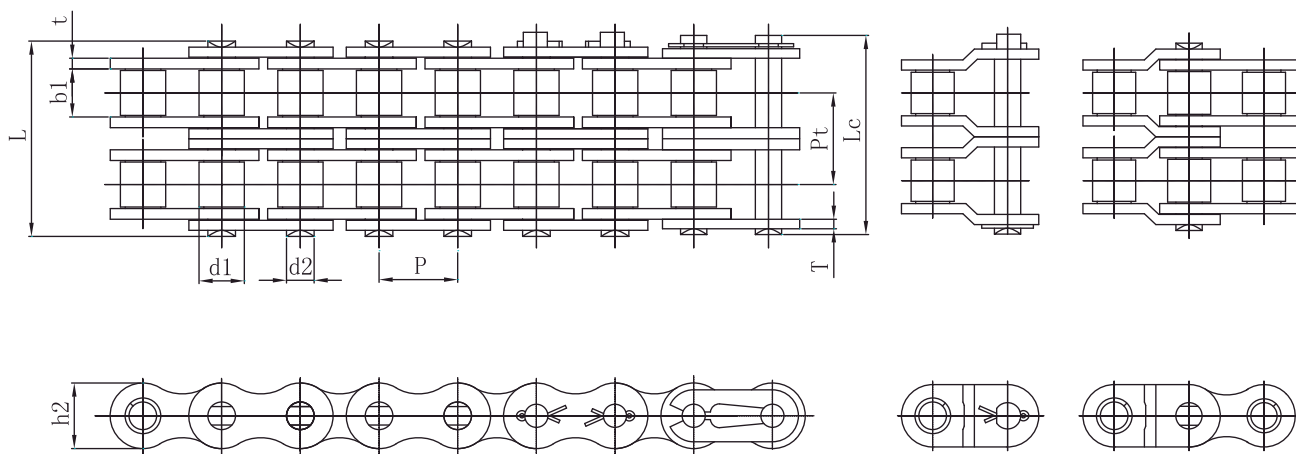

SERIE EUROPEA / EUROPEAN SERIES

Cadena ISO/DIN Chain No.	Paso Pitch P mm	Diám. Rodillo Roller diameter d ₁ max mm	Ancho interno Width between inner plates b ₁ min mm	Diámetro del eje Pin diameter d ₂ max mm	Largo de la unión Pin length		Altura malla Inner plate depth h ₂ max mm	Grosor malla Plate thickness t/T mm	Ancho entre ejes Transverse pitch Pt mm	Carga mín. de rotura Ultimate tensile strength Q (ISO/DIN) min kN	Carga media de rotura Average tensile strength Q ₀ kN	Peso aprox. Weight per meter q kg/m
					L max mm	Lc max mm						
05B-2	8.00	5.00	3.00	2.31	13.90	14.50	7.10	0.80	5.64	7.80	10.20	0.33
*06B-2	9.525	6.35	5.72	3.28	23.40	27.10	8.26	1.34	10.24	16.90	18.10	0.74
08B-2	12.70	8.51	7.75	4.45	31.00	33.00	11.81	1.60	13.92	31.10/32.00	37.40	1.34
10B-2	15.875	10.16	9.65	5.08	36.10	38.60	14.73	1.70	16.59	44.50	54.20	1.84
12B-2	19.05	12.07	11.68	5.72	42.00	44.40	16.13	1.85	19.46	57.80	66.60	2.31
16B-2	25.40	15.88	17.02	8.28	68.00	73.40	21.08	4.09/3.10	31.88	106.00	126.50	5.42
20B-2	31.75	19.05	19.58	10.19	79.70	83.60	26.42	4.60/3.60	36.45	170.00	210.00	7.20
24B-2	38.10	25.40	25.40	14.63	101.80	105.42	33.40	5.80/4.80	48.36	280.00	305.50	13.40
28B-2	44.45	27.94	30.99	15.90	124.70	128.96	37.08	7.50/6.50	59.56	360.00	390.50	16.60
32B-2	50.80	29.21	30.99	17.81	124.60	128.05	42.29	7.00/6.00	58.55	450.00	487.50	21.00
40B-2	63.50	39.37	38.10	22.89	154.50	163.80	52.96	8.50/7.50	72.29	630.00	680.20	32.00
48B-2	76.20	48.26	45.72	29.24	190.40	200.90	63.88	11.70/10.00	91.21	1000.00	1070.00	50.00
56B-2	88.90	53.98	53.34	34.32	221.2	229.6	77.80	13.5/12.0	106.6	1600.00	1760.00	71.48
64B-2	101.60	63.50	60.96	39.40	249.9	258.4	90.17	15.0/13.0	119.89	2000.00	2200.00	91.00
72B-2	114.30	72.39	68.58	44.48	283.7	292.7	103.60	17.0/15.0	136.27	2500.00	2750.00	120.40

*Disponible en malla plana

*Straight side plates