

Plaquita de corte de roscado ISO, exterior, 60° métrica, perfil macizo




2.5

| Designación ISO | Tipo de material de corte | Paso mm | Velocidad de corte | P | M | K | N | S | H | U.E. | format | Ref. | |
|-----------------|---------------------------|---------|----------------------|---------|------------|-----------|----------|-------------|----------|------|--------|-------|---------|
| | | | | acero | inoxidable | fundición | aluminio | superaleac. | templado | | 2969 | | |
| 16 ER 050 | U 9035 | 0,50 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0300 |
| 16 ER 075 | U 9035 | 0,75 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0303 |
| 16 ER 100 | U 9035 | 1,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0306 |
| 16 ER 125 | U 9035 | 1,25 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0309 |
| 16 ER 150 | U 9035 | 1,50 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,24 | ...0312 |
| 16 ER 175 | U 9035 | 1,75 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0315 |
| 16 ER 200 | U 9035 | 2,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,24 | ...0318 |
| 16 ER 250 | U 9035 | 2,50 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0321 |
| 16 ER 300 | U 9035 | 3,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0324 |
| 16 EL 100 | U 9035 | 1,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0206 |
| 16 EL 125 | U 9035 | 1,25 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0209 |
| 16 EL 150 | U 9035 | 1,50 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0212 |
| 16 EL 175 | U 9035 | 1,75 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0215 |
| 16 EL 200 | U 9035 | 2,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0218 |
| 16 EL 250 | U 9035 | 2,50 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0221 |
| 16 EL 300 | U 9035 | 3,00 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0224 |

Δ Solo es posible la entrega de una unidad de embalaje completa.

(W288)

Juego de plaquitas de roscado, exterior, 60° métricas, perfil macizo

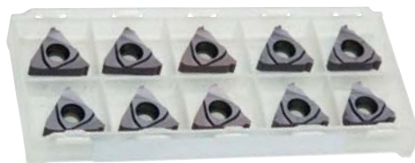

| Designación ISO | Tipo de material de corte | Velocidad de corte | P | M | K | N | S | H | Pieza x paso mm | format | Ref. | |
|-----------------|---------------------------|----------------------|---------|------------|-----------|----------|-------------|----------|---|--------|--------|---------|
| | | | acero | inoxidable | fundición | aluminio | superaleac. | templado | | 2969 | | |
| 16 ER | PK35 | v _c m/min | 100-150 | 80-120 | 90-125 | - | - | - | 2 x 0,75; 2 x 1,0; 2 x 1,25; 2 x 1,5; 1 x 1,75; 1 x 2,0 | € | 141,94 | ...0390 |
| 16 EL | PK35 | v _c m/min | 100-150 | 80-120 | 90-125 | - | - | - | 2 x 0,75; 2 x 1,0; 2 x 1,25; 2 x 1,5; 1 x 1,75; 1 x 2,0 | € | 141,94 | ...0395 |

(W288)

Plaquita de corte de roscado ISO, exterior, 55° WW, perfil macizo



| Designación ISO | Tipo de material de corte | Velocidad de corte | P | M | K | N | S | H | U.E. | format | Ref. | |
|-----------------|---------------------------|----------------------|---------|------------|-----------|----------|-------------|----------|------|--------|-------|---------|
| | | | acero | inoxidable | fundición | aluminio | superaleac. | templado | | 2969 | | |
| 16 ER 080 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0500 |
| 16 ER 100 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 22,81 | ...0506 |
| 16 ER 110 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 23,31 | ...0509 |
| 16 ER 120 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0512 |
| 16 ER 140 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0515 |
| 16 ER 160 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0518 |
| 16 ER 180 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0521 |
| 16 ER 190 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0524 |
| 16 ER 200 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0527 |
| 16 ER 280 | U 9035 | v _c m/min | 135-165 | 80-95 | 125-155 | 200-575 | 25-45 | 25-30 | 10 Δ | € | 24,63 | ...0530 |

Δ Solo es posible la entrega de una unidad de embalaje completa.

(W288)