

Tornillo micrométrico incorporado

Características: con superficies de medición de metal duro, husillo giratorio.



4185 0001-0007




4185 0009



4185 0011


Rango de medición mm	Lectura mm	a mm	b mm	c mm	4185 €	Ref.
0- 6,5	0,01	6	6	-	41,60	...0001
0-13	0,01	9,5	9,5	-	45,94	...0003
0-25	0,01	10	15	-	39,42	...0005
0-25	0,01	12	17	-	53,71	...0007
0-25	0,01	10	15	4	56,19	...0009
0-25	0,001	12	17	-	96,54	...0011

(W112)

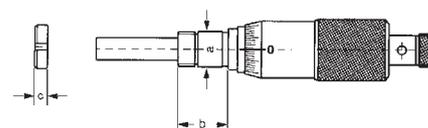

Micrómetro de interiores con pico de medición


Características: escala graduada en cromo mate, superficies de medición de metal duro y lapeadas con la mayor precisión, con tornillos de retención, ajuste de la fuerza de medición mediante trinquete.



4305 0030 [mm]



4305 0030



4305 0050-0100 [mm]



4305 0050-0100

Rango de medición mm	Lectura mm	Paso de husillo mm	∅ del tambor de medición mm	4305 €	Ref.
5- 30	0,01	0,5	17	115,33	...0030
25- 50	0,01	0,5	17	126,67	...0050
50- 75	0,01	0,5	17	141,94	...0075
75-100	0,01	0,5	17	157,21	...0100

(W112)

