

Plaquita de corte de roscado ISO, exterior, 60° métrica, perfil macizo




2.5

Designación ISO	Tipo de material de corte	Paso mm	Velocidad de corte	P acero	M inoxidable	K fundición	N aluminio	S superaleac.	H templado	U.E. 10 Δ	format	
											2969	Ref.
											€	
16 ER 050	U 9035	0.50	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0300
16 ER 075	U 9035	0.75	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0303
16 ER 100	U 9035	1.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0306
16 ER 125	U 9035	1.25	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0309
16 ER 150	U 9035	1.50	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,37	...0312
16 ER 175	U 9035	1.75	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0315
16 ER 200	U 9035	2.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,37	...0318
16 ER 250	U 9035	2.50	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0321
16 ER 300	U 9035	3.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0324
16 EL 100	U 9035	1.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0206
16 EL 125	U 9035	1.25	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0209
16 EL 150	U 9035	1.50	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0212
16 EL 175	U 9035	1.75	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0215
16 EL 200	U 9035	2.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0218
16 EL 250	U 9035	2.50	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0221
16 EL 300	U 9035	3.00	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0224

Δ Solo es posible la entrega de una unidad de embalaje completa.

(W105)


Juego de plaquitas de roscado, exterior, 60° métricas, perfil macizo

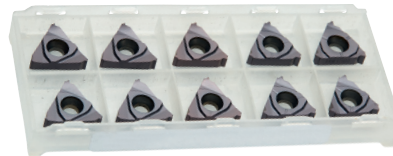

Designación ISO	Tipo de material de corte	Velocidad de corte	P acero	M inoxidable	K fundición	N aluminio	S superaleac.	H templado	Pieza x paso mm	format	
										2969	Ref.
										€	
16 ER	PK35	v _c m/min	100-150	80-120	90-125	-	-	-	2 x 0,75; 2 x 1,0; 2 x 1,25; 2 x 1,5; 1 x 1,75; 1 x 2,0	130,62	...0390
16 EL	PK35	v _c m/min	100-150	80-120	90-125	-	-	-	2 x 0,75; 2 x 1,0; 2 x 1,25; 2 x 1,5; 1 x 1,75; 1 x 2,0	130,62	...0395

(W105)

Plaquita de corte de roscado ISO, exterior, 55° WW, perfil macizo



Designación ISO	Tipo de material de corte	Velocidad de corte	P acero	M inoxidable	K fundición	N aluminio	S superaleac.	H templado	U.E. 10 Δ	format		
										2969	Ref.	
											€	
16 ER 080	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0500	
16 ER 100	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,00	...0506	
16 ER 110	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	22,47	...0509	
16 ER 120	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0512	
16 ER 140	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0515	
16 ER 160	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0518	
16 ER 180	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0521	
16 ER 190	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0524	
16 ER 200	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0527	
16 ER 280	U 9035	v _c m/min	135-165	80-95	125-155	200-575	25-45	25-30	10 Δ	23,77	...0530	

Δ Solo es posible la entrega de una unidad de embalaje completa.

(W105)