


### Fresa atornillable, 90°

Ø D mm	Z	Ø d h6 mm	Ø d1 mm	L mm	M	a <sub>p</sub> máx. mm	Plaquita de corte	format	
								2999	Ref.
16	2	8,5	13,5	25	M8	9	APKT/APMT 1003...	176,51	...0630
20	3	10,5	18	30	M10	9	APKT/APMT 1003...	247,78	...0640
25	4	12,5	21	35	M12	9	APKT/APMT 1003...	281,22	...0650
32	5	17	29	43	M16	9	APKT/APMT 1003...	306,94	...0660

(W280)

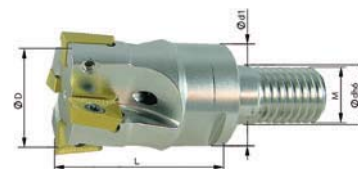

Suministro sin plaquitas de corte.

### Pieza de recambio

Características	U.E.	format		Ref.
		2999	5886	
Tornillo	5 Δ	8,41	-	...0051
Destornillador T7 x 60 mm	1	-	10,59	...0020

(W281) (W543)



Δ Solo es posible la entrega de una unidad de embalaje completa.

### Plaquita de corte ISO



Designación ISO	Tipo de material de corte	Velocidad de corte Avance Profundidad v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	format					U.E.	2999	
			P Acero	M Inoxidable	K Fundición	N Aluminio	S Superalec.		H Templado	€
APMT 1003	Aluminio	v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	- - -	- - -	- - -	125-560 0,05-0,30 0,8-9	- - -	10 Δ	11,25	...5140
APMT 1003	UNI	v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	185-255 0,10-0,25 1,0-9	110-150 0,10-0,19 1,0-6,8	175-240 0,10-0,25 1,0-9,0	- - -	- - -	10 Δ	7,83	...5143
APMT 1003	INOX	v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	185-255 0,10-0,25 1,0-9	110-150 0,10-0,19 1,0-6,8	- - -	35-75 0,1-0,15 1,0-5,4	- - -	10 Δ	7,83	...5146
APKT 1003PDER-M	PMK 9130	v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	165-255 0,1-0,25 1-9	95-150 0,1-0,19 1-6,8	155-240 0,1-0,25 1-9	- 0,1-0,15 1-5,4	- - -	10 Δ	9,71	...5073
APKT 1003PDER-M	U 9145	v <sub>c</sub> m/min f <sub>z</sub> mm a <sub>p</sub> mm	165-255 0,1-0,25 1-9	95-150 0,1-0,19 1-6,8	155-240 0,1-0,25 1-9	- 0,1-0,15 1-5,4	- - -	10 Δ	9,71	...5076


(W282,W290)

Δ Solo es posible la entrega de una unidad de embalaje completa.

### Fresa frontal, 90°, cilíndrica

Ø D mm	Z	Ø d g7 mm	L mm	l <sub>1</sub> mm	a <sub>p</sub> máx. mm	Plaquita de corte	format	
							2999	Ref.
25	2	25	100	44	14	APET/APMT/APKT 1604...	259,64	...0500
32	3	32	110	50	14	APET/APMT/APKT 1604...	319,11	...0505

(W280)



Suministro sin plaquitas de corte.